

Ortam

Ürün sertifikaları	CSA[RETURN]JUL
Çalışma için ortam hava sıcaklığı	-25...70 °C
Depolama ortam koşulları	-40...85 °C
Titreşim direnci	25 gn genlik = +/- 2 mm[Alan](f =[Alan]10...55 Hz) 'e uygunIEC 60068-2-6
Darbe dayanımı	50 gn için 11 ms 'e uygunIEC 60068-2-27

Paketleme üniteleri

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2,000 cm
Package 1 Width	8,300 cm
Package 1 Length	15,500 cm
Package 1 Weight	39,000 g
Unit Type of Package 2	S03
Number of Units in Package 2	44
Package 2 Height	30,000 cm
Package 2 Width	30,000 cm
Package 2 Length	40,000 cm
Package 2 Weight	2,458 kg


Sürdürülebilirlik Teklifi

Sürdürülebilirlik durumu	Green Premium ürünü
Döngüsellik Profili	Kullanım Sonu Bilgileri
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
TÄ¼m Reach Rohs sorgularÄ± iÅŸin bizimle iletiÅŸim kurun	sustainability@tesensors.com

Sözleşme garantisi


Garanti	18 months
---------	-----------

Dimensions

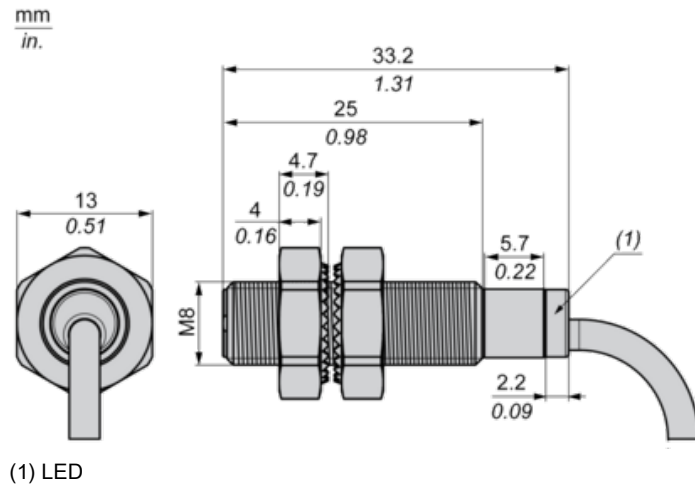


Minimum Mounting Distances in mm

Side by side

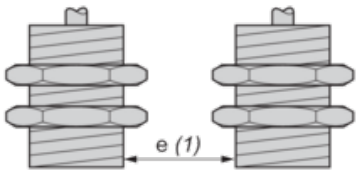


$e (1) \geq 5 \text{ mm} / 0.20 \text{ in.}$

Face to face

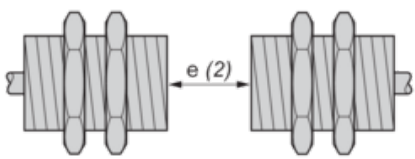


$e (2) \geq 30 \text{ mm} / 1.18 \text{ in.}$

Facing a metal object

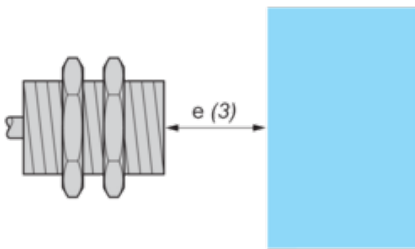

$e (3) \geq 8 \text{ mm} / 0.31 \text{ in.}$


Mounting

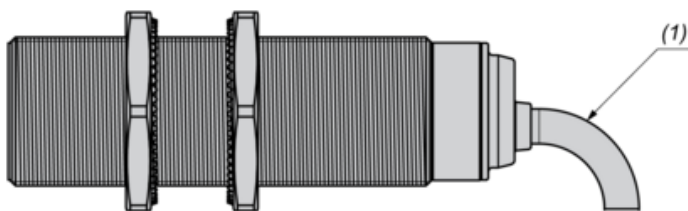

(1) Bending cable: 4 x external cable diameter

Wiring Schemes

NPN

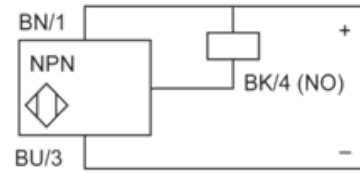


BU : Blue

BN : Brown

BK : Black

Performance Curves

Standard Steel Target (mm) : 8x8x1

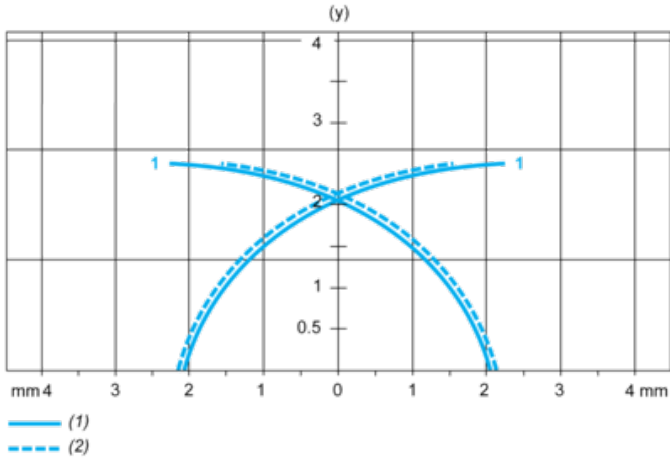

(1) Pick-up points

(2) Drop-out points (object approaching from the side)

(y) Sensing distance in mm